


B100002

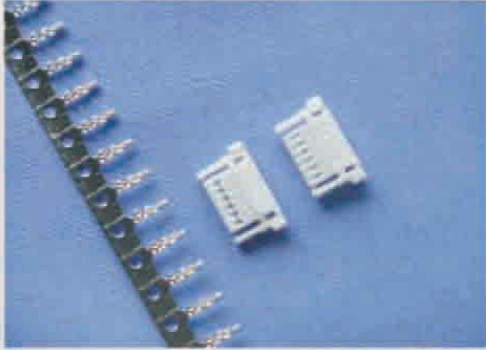

- ▶ 主要技术特性 (Main Specifications)
- ▶ 适用导线规格 (Applicable wire) : AWG32#~28#
- ▶ 适用基板厚度 (Applicable PC board thickness) : 0.8mm
- ▶ 温度范围 (Temperature range) : -25°C~+85°C
- ▶ 额定电压 (Voltage rating) : 125V AC, DC
- ▶ 额定电流 (Current rating) : 1A AC, DC
- ▶ 接触电阻 (Contact resistance) : $\leq 0.01\Omega$
- ▶ 绝缘电阻 (Insulation resistance) : $\geq 100M\Omega$
- ▶ 耐压 (Withstanding voltage) : 250V AC/minute

材料及电镀规格 Material and Finish


型号 Type	材料 Material	材料厚度 Material Thickness	电镀规格 Finish
孔座 HOUSING	PA66 UL94V-0	—	N/A
端子 TERMINAL	锡青铜 Phosphor bronze	0.12mm	镀锡 Tin-plated

产品尺寸图 Product size chart

 单位: mm 一般公差: ± 0.20


TERMINAL

B100002-4 SSHJ-003T-P0.2

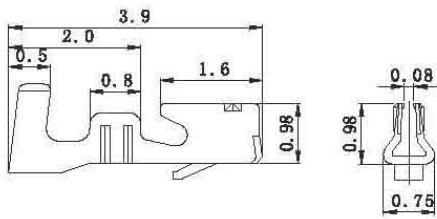

HOUSING

B100002-2

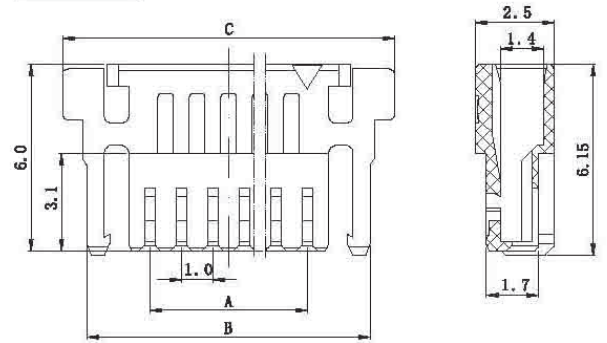

HOUSING

极数 Circuits	型号 Type	尺寸(Dimensions)mm			备注型号 P. S. Type
		A	B	C	
4	B100002-2-04	3.0	7.0	8.6	SHJP-04P
5	B100002-2-05	4.0	8.0	9.6	SHJP-05P
6	B100002-2-06	5.0	9.0	10.6	SHJP-06P
7	B100002-2-07	6.0	10.0	11.6	SHJP-07P
8	B100002-2-08	7.0	11.0	12.6	SHJP-08P
9	B100002-2-09	8.0	12.0	13.6	SHJP-09P
10	B100002-2-10	9.0	13.0	14.6	SHJP-10P
11	B100002-2-11	10.0	14.0	15.6	SHJP-11P
15	B100002-2-15	14.0	18.0	19.6	SHJP-15P